

1600W/4Ω • MONO 24V
CLASS-D AMPLIFIER




CA 3000P1/24V



- Max power output @24V:
1x 1600W/4Ω
1x 2100W/2Ω
1x 3750W/1Ω
- RMS output @24V:
1x 520W/4Ω
1x 850W/2Ω
1x 1250W/1Ω
- Brushed aluminium heat sink
- RCA line input
- RCA line output
- Phase shift (0-180°)
- Bass Boost (0~12dB • 22~70Hz)
- Variable input sensitivity
- Overload and thermal protection
- Wired remote control
- Dimensions: 350(W) x 151(D) x 50(H) mm



- Puissance maximale @24V:
1x 1600W/4Ω
1x 2100W/2Ω
1x 3750W/1Ω
- Sortie RMS @24V:
1x 520W/4Ω
1x 850W/2Ω
1x 1250W/1Ω
- Dissipateur thermique en aluminium brossé
- Entrée de ligne RCA
- Sortie ligne RCA
- Décalage de phase (0-180°)
- Amplification des basses (0~12dB • 22~70Hz)
- Sensibilité d'entrée variable
- Protection de surcharge et thermique
- Télécommande de câble
- Dimensions: 350(l) x 151(p) x 50(h)mm

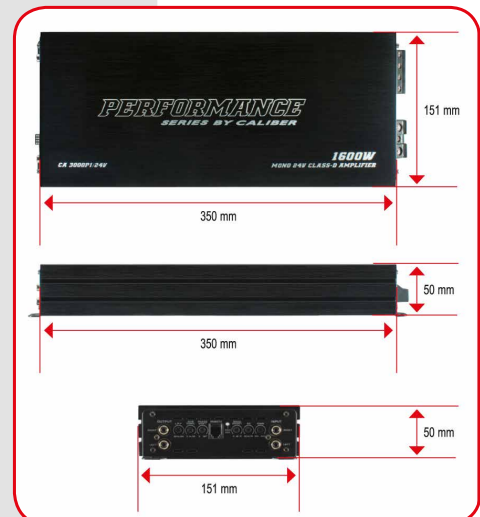

CALIBER EUROPE BV

Kortakker 10 • 4264 AE Veen
The Netherlands • Tel: +31 416-699 000



www.caliber.nl