




CA 100V2



- Max power output @14,4V:
2x 150W/4Ω or 1x500W 4Ω (bridged)
- RMS output @14,4V:
2x 50W/4Ω or 1x160W/4Ω (bridged)
- Illuminated Venom logo
- RCA line input
- RCA line output
- High level input
- Bass Boost (0-6-12dB • 45Hz)
- Variable input sensitivity
- Overload and thermal protection
- Dimensions: 240(W) x 220(D) x 46(H) mm



- Max power output @14,4V:
2x 150W/4Ω ou 1x500w 4Ω (avec pont)
- Puissance de sortie RMS @ 14.4V:
2x 50W/4Ω ou 1x160W/4Ω (avec pont)
- Logo lumineux Venom
- Entrée de ligne RCA
- Sortie ligne RCA
- Entrée niveau haut
- Amplification des basses(0-6-12dB • 45Hz)
- Sensibilité d'entrée variable
- Protection de surcharge et thermique
- Dimensions: 240(l) x 220(P) x 46(H) mm

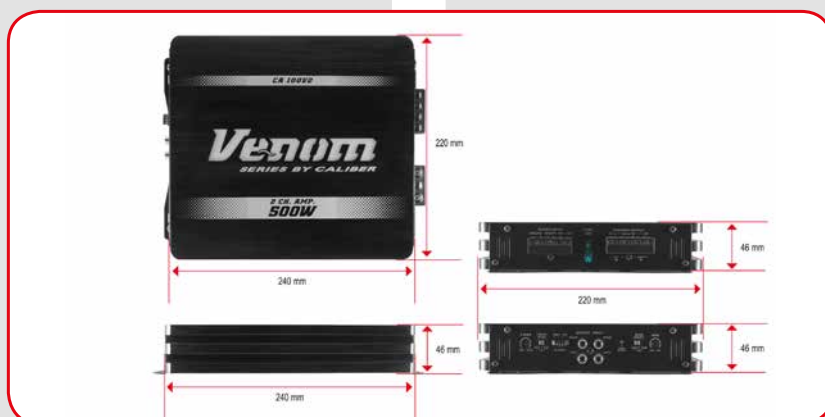

CALIBER EUROPE BV

Kortakker 10 • 4264 AE Veen
The Netherlands • Tel: +31 416-699 000



www.caliber.nl