




CA 160P2



- Max power output @14.4V:
2x 250W/4Ω or 1x 700W/4Ω (bridged)
- RMS output @14.4V:
2x 80W/4Ω or 1x 240W/4Ω (bridged)
- Brushed aluminium heatsink
- RCA line input
- RCA line output
- High level input
- Bass Boost (0-6-12dB • 45Hz)
- Variable input sensitivity
- Overload and thermal protection
- Dimensions: 260(W) x 151(D) x 50(H) mm



- Max power output @14.4V:
2x 250W/4Ω ou 1x 700W/4Ω (avec pont)
- Puissance de sortie RMS @14.4V:
2x 80W/4Ω ou 1x 240W/4Ω (avec pont)
- Dissipateur thermique en aluminium brossé
- Entrée de ligne RCA
- Sortie ligne RCA
- Entrée niveau haut
- Amplification des basses (0-6-12dB • 45Hz)
- Sensibilité d'entrée variable
- Protection de surcharge et thermique
- Dimensions: 260(l) x 151(P) x 50(H) mm

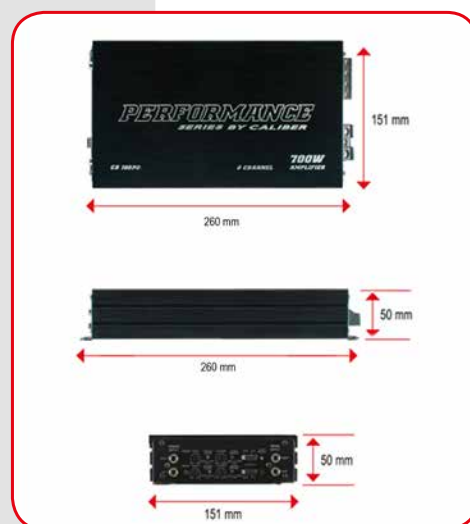

CALIBER EUROPE BV

Kortakker 10 • 4264 AE Veen
The Netherlands • Tel: +31 416-699 000



www.caliber.nl